


SPECIFICATION SHEET

UT-11A

Recessed electronic infrared flushing control for urinal with a vandal proof complete stainless steel plate in satin finish. ABS valve within the High grade ABS body box

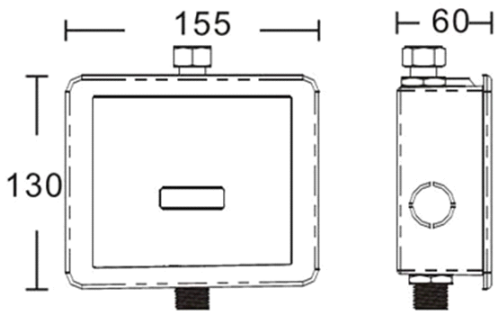

Model No.	UT-11A	UT-11S
	Battery Operated	Electrically Operated
External Material	Screwless s/s plate	Screwless s/s plate
Dimensions	155 X 130 mm	Dimensions 155 X 130 mm
Power	4 "AA" Alkaline Batteries	AC operated
Battery life	2 year's with 100 operations /day	NA
Water pressure	0.4-8 bar	Water pressure 0.4-8 bar
Detection range	Automatic	Detection range Automatic
Flushing time	6 s	Flushing time 6 s
Plumbing Connections	G 1/2"	Plumbing Connections G 1/2"
Ambient temperature	1~55°C	Ambient temperature 1~55°C
Power consumption in satic	= 0.5 mW (DC), =3W(AC)	Power consumption in satic = 0.5 mW (DC), =3W(AC)