


SPECIFICATION SHEET

UT-125B

Electronic flush valve for toilet operated by IR sensor. Includes override flush activator switch giving the user the possibility of alternative manual touch activation.

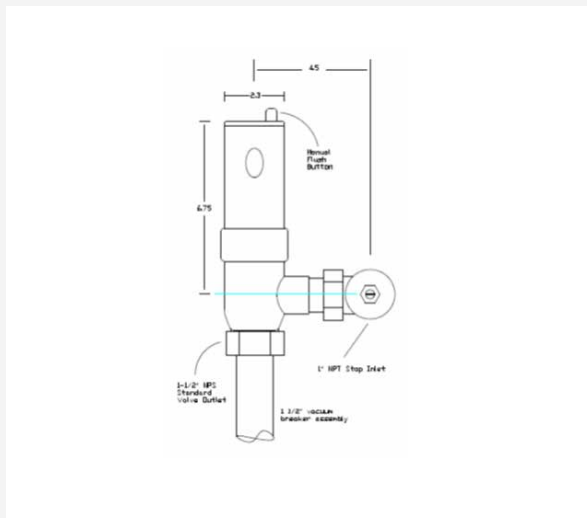

Model No.	UT- 125B
Power	Battery operated external model Solid brass valve for long lasting operation mechanical over ride button (for emergency)
Body	Solid brass
Stop	Solid brass
Spud	1-1/2", 9" long with vacuum breaker
Power	4 AA Alkaline batteries
Solenoid valve	6 Volt magnet latching
Working Water Pressure	1 PSI -100 PSI
Water Inlet Size	1" at stop
Water Outlet Size	1-1/2" at spud
Water Flow Control	Yes, at stop
Flush Cycle	1.2 GPF/4.5 LPF Field Adjustable
Valving System	Piston type
Strainer	50 Mesh
Sensor type and Location	Active Infrared, body mount
Sensor Microprocessor	Digital, Plug And Play
Sensing Zone	8" to 32"