


SPECIFICATION SHEET

UT-15B

Retrofit model exposed type battery operated
 – chrome plated ABS body Suited for existing installation where flushing is done manually and no breakage is desired with an exposed structure, the installation and maintenance is very convenient.

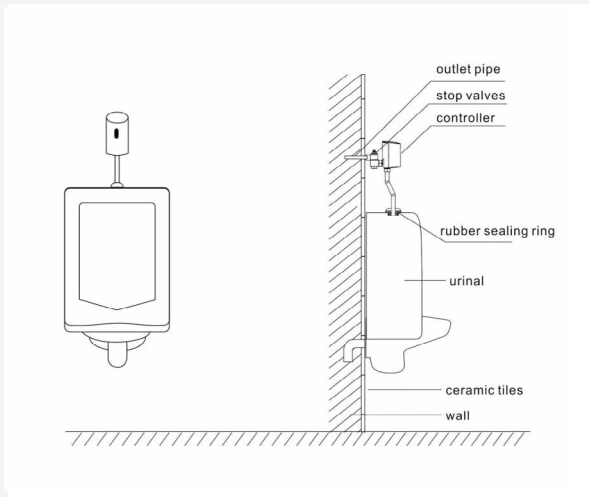

Model No.	UT-15B
	Battery Operated
Power	4 "AA" Alkaline Batteries
Battery life	2 year's with 100 operations /day
Water pressure	0.4-8 bar
Detection range	Automatic
Flushing time	6 s
Plumbing Connections	G 1/2"
Ambient temperature	1~55°C
Power consumption in static	= 0.5 mW (DC), =3W(AC)